




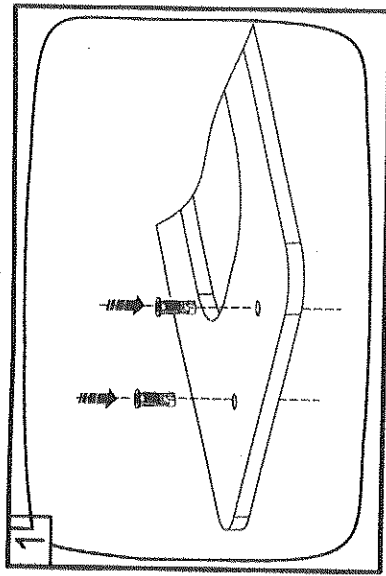


1 Insert the expansion rubbers into the hinge holes of the WC pan.

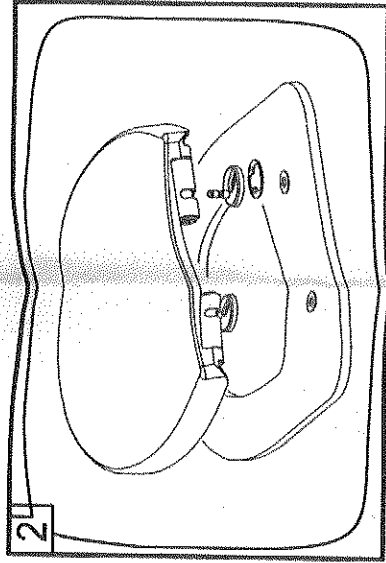


2 Mount the hinges onto the shaft of the toilet seats.

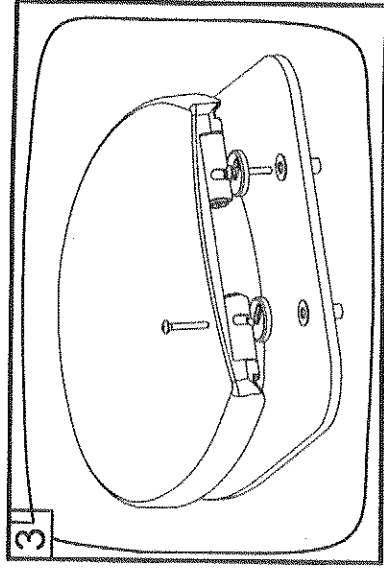


3 Plug the bolt into the expansion rubber.

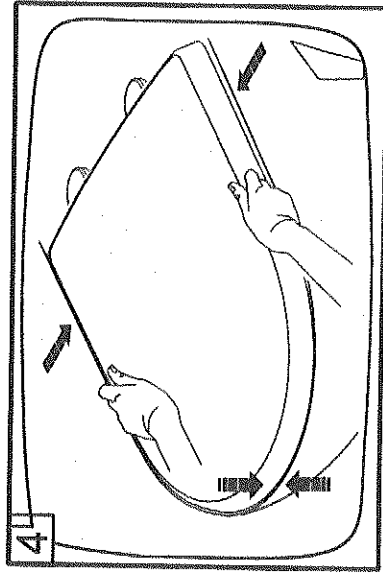


4 Align the toilet seats with the WC pan.

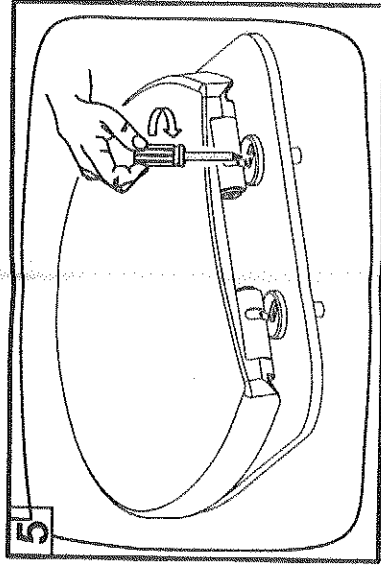


5 Screw the bolts.

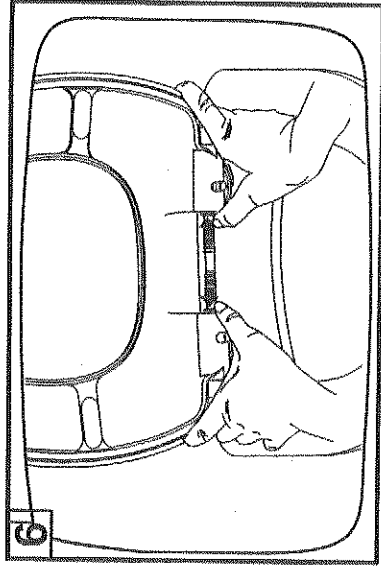


6 Push the right and left buttons.

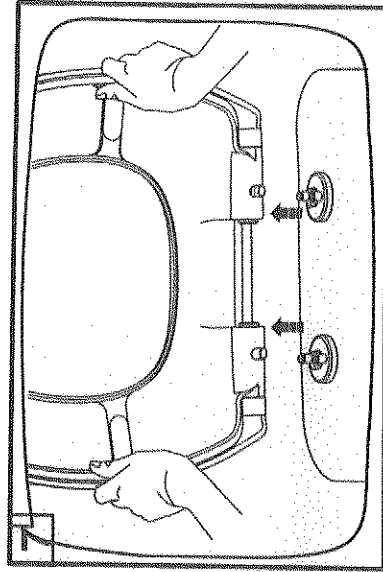

7 Lift the toilet seats.

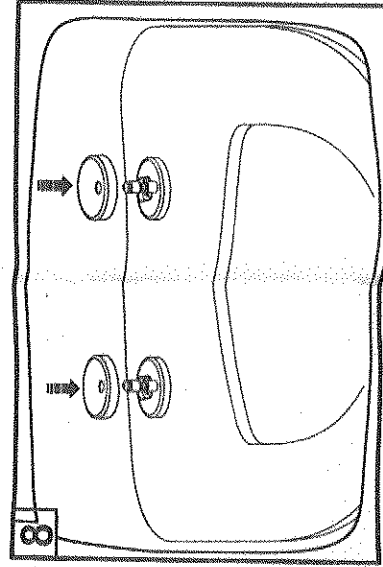

8 Put on the cover of the hinge.

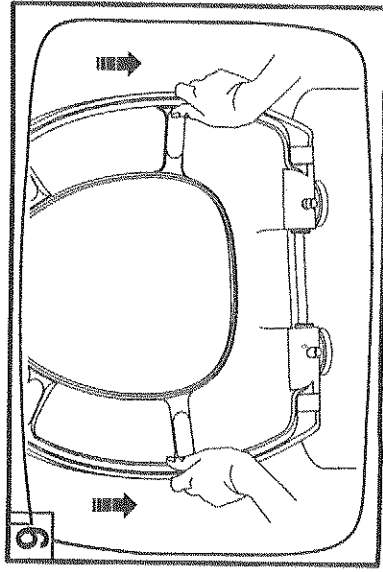

9 Mount the toilet seats.