



15 Ft
150 Ft




CONNECTIONS

- Discharge: 1"
- Inlet: 1-1/2"
- Vent: 1-1/2"
- Easy-access to blade, pressure chamber/electrical parts for easy service/replacement.

PRODUCT FEATURES

- Install a half bathroom up to 15 feet below the sewer line, or even up to 150 feet away.
- Macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

PUMP CURVE

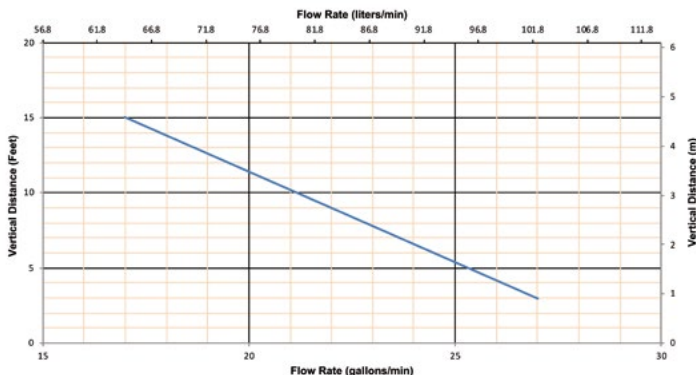

OPTIONAL ACCESSORIES

Extension Pipe
(Part N° 030)
See page 57



Descaler
(Part N° 052)
See page 57



TECHNICAL SPECIFICATIONS

Pump type: Macerator

Electrical: 120 V - 60 Hz / 4.5 Amps (Max)

Motor: 0.5 HP oil-filled thermally protected motor

Capacitor rating: 45 microfarad

Operating Temperature: 104°F (110°F Max.)

Power cord length: 51 inches

Noise level: ≤ 53 dBA (Lp) (measured at 3 ft.)

Discharge pipe diameter: 3/4" or 1"

Discharge rate at 15 ft: 17 GPM

Discharge rate at 3 ft: 27 GPM

Shut-off head: 30 ft.

Normal running time: 10-12 seconds

Capacity: 2.3 gallons / 8.7 liters

Inlets: 1-1/2" (side), 1-1/2" vent (side)

Method of activation: Membrane/microswitch

Weight: 15 lbs / 6.8 kg

Certifying agencies: CSA (IPC, NSPC), IAPMO (UPC)

Connections: Saniflo's rear outlet toilet, sink

DIMENSIONAL DRAWINGS

