



15 Ft
150 Ft




CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 1-1/2"
- Vent: 1-1/2"

PRODUCT FEATURES

- Install a complete bathroom up to 15 feet below the sewer line, or even up to 150 feet away.
- Macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

PUMP CURVE

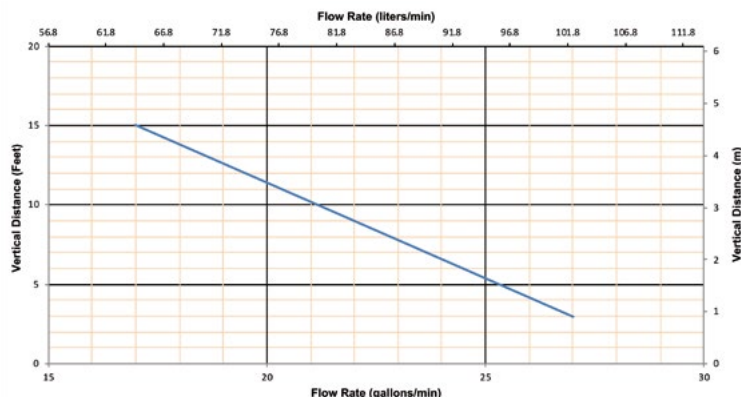

OPTIONAL ACCESSORIES

Sanialarm

(Part N° 050)
See page 57



Descaler

(Part N° 052)
See page 57



TECHNICAL SPECIFICATIONS

Pump type: Macerator

Electrical: 110 V - 60 Hz / 4.5 Amps (Max)

Motor: 0.5 HP oil-filled thermally protected motor

Capacitor rating: 45 microfarad

Operating Temperature: 104°F (110°F Max.)

Power cord length: 48 inches

Noise level: ≤ 53 dBA (Lp) (measured at 3 ft.)

Discharge pipe diameter: 3/4" or 1"

Discharge rate at 15 ft: 17 GPM

Discharge rate at 3 ft: 27 GPM

Shut-off head: 30 ft.

Normal running time: Depends on toilet system

Capacity: 3.5 gallons / 13.2 liters

Inlets: 1-1/2" (sides), 1-1/2" vent (top)

Method of activation: Membrane/microswitch

Shower base height: 6" min

Weight: 17 lbs / 7.7 kg

Certifying agencies: CSA (IPC, NSPC), IAPMO (UPC)

Connections: Wall hung toilet, sink, shower

DIMENSIONAL DRAWINGS

